
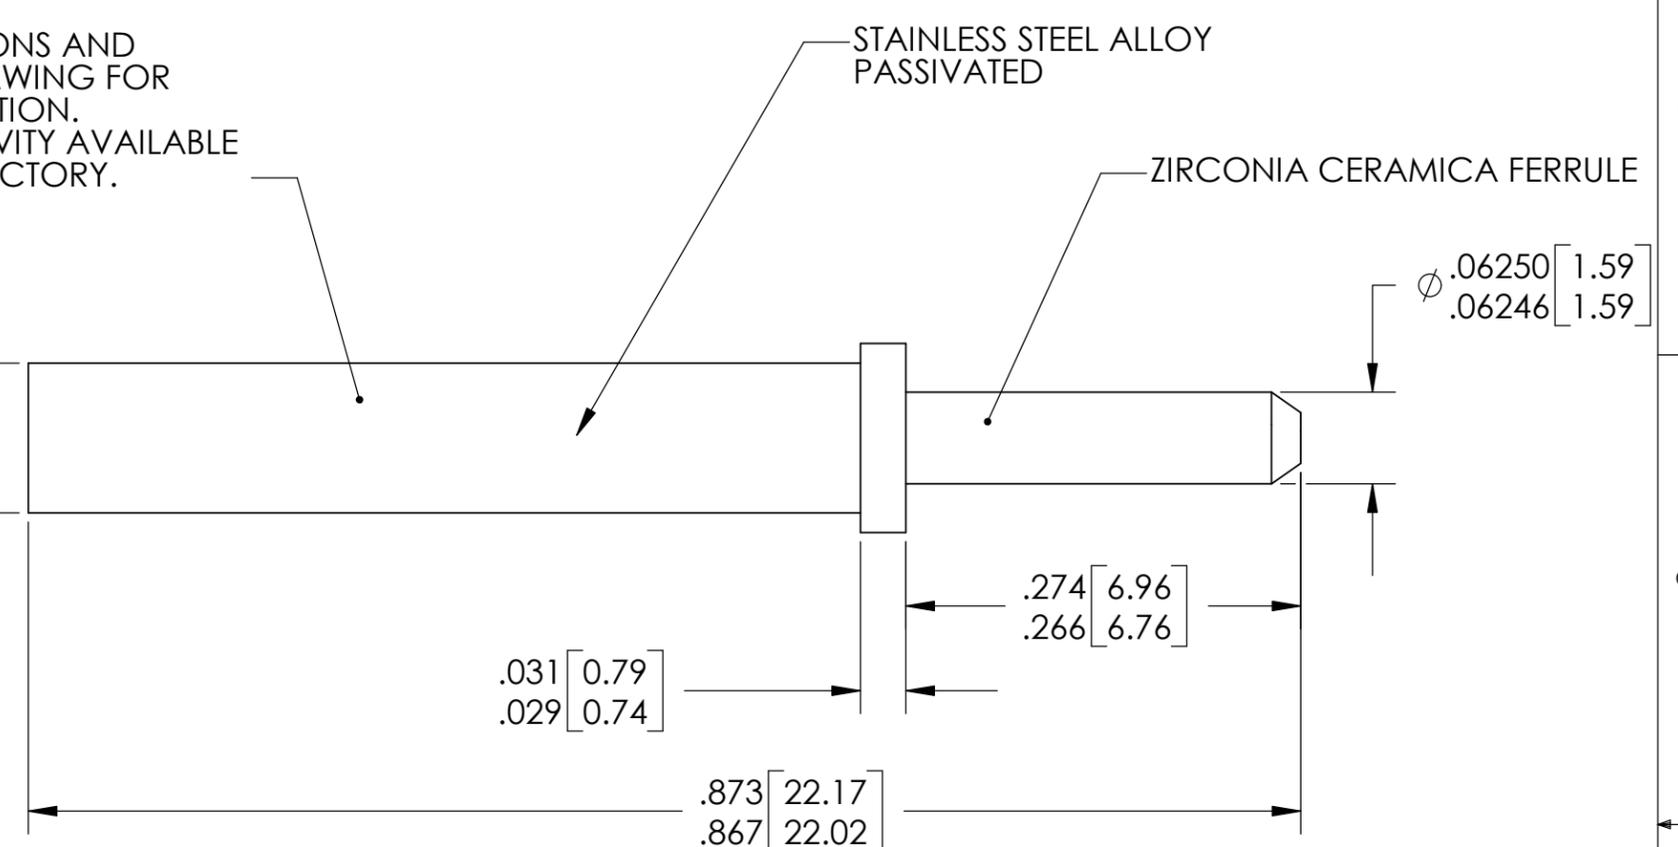



XIOPTICS RESERVES THE RIGHT TO CHANGE ANY OR ALL OF THIS DOCUMENT WITHOUT NOTIFICATION. INFORMATION IN THIS DOCUMENT SHOULD BE CONSIDERED REFERENCE ONLY

FIBER CABLE BONDING CUP
SEE TERMINATION INSTRUCTIONS AND FIBER CABLE STRIP BACK DRAWING FOR PREPARATION AND TERMINATION. SPECIAL INTERNAL BODY CAVITY AVAILABLE UPON REQUEST, CONSULT FACTORY.

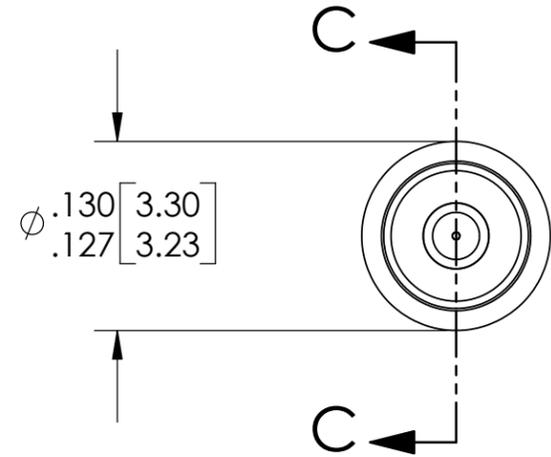

29504 PIN ORDERING INFORMATION:

XOP29504-4-SM-900-1255-Q2

SM: SINGLE MODE
MM: MULTI MODE


Q2: QPL
C2: COTS

P/N	DESCRIPTION
900	900 MICRON JACKET FIBER
2200	1.2MM JACKET FIBER
2200	1.8MM JACKET FIBER
2200	2.0MM JACKET FIBER

FIBER JACKET DIAMETER

P/N	DESCRIPTION
1250	125.0 FERRULE
1255	125.5 FERRULE
1260	126.0 FERRULE
1270	127.0 FERRULE
1560	156.0 FERRULE
1420	142.0 FERRULE
1730	173.0 FERRULE
2360	236.0 FERRULE

FERRULE FIBER HOLE DIAMETER

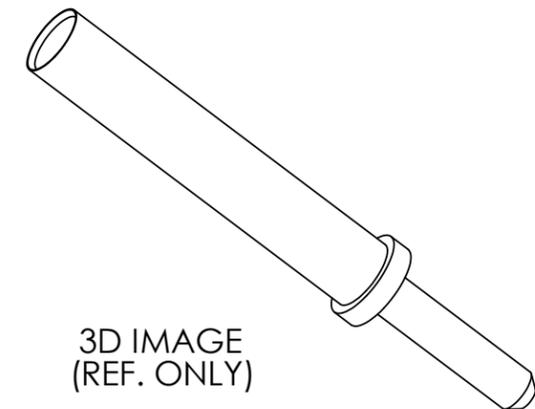

UNLESS OTHERWISE SPECIFIED:		NAME	DATE	XiOptics, LLC
DIMENSIONS ARE IN INCHES AND [MM]		DRAWN		
TOLERANCES:		CHECKED		TITLE:
ANGULAR: MACH ± 1 BEND ± 3		ENG APPR.		ASSEMBLY, 29504 PIN
TWO PLACE DECIMAL ± .01		MFG APPR.		CUSTOMER USE,
THREE PLACE DECIMAL ± .005		Q.A.		STYLE 2
FOUR PLACE DECIMAL ± .0005		COMMENTS:		SIZE DWG. NO. REV
INTERPRET GEOMETRIC TOLERANCING PER: ANSI Y14.5M				B XOPA0001 CU1
MATERIAL				SCALE: CADWEIGHT: SHEET 1 OF 1
FINISH				
DO NOT SCALE DRAWING				