



8 7 6 5 4 3 2 1

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF WRAITHCON. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF XIOPTICS IS PROHIBITED.

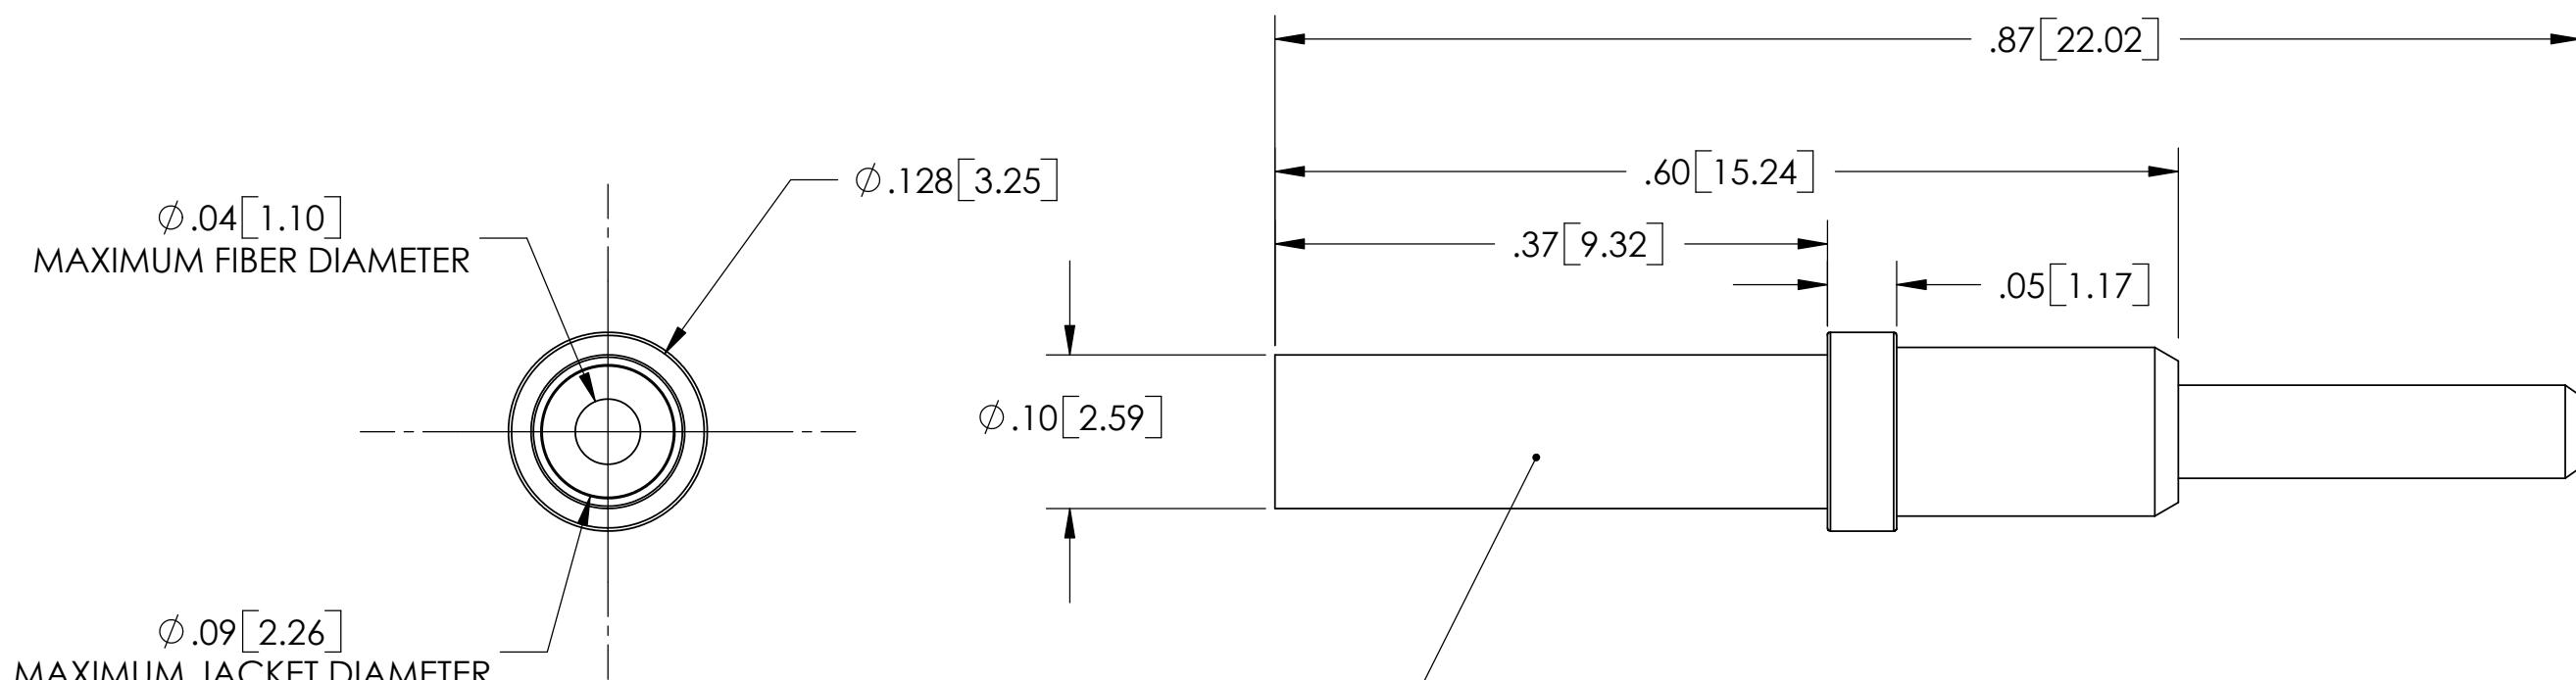

FIBER CABLE BONDING CUP
SEE TERMINATION INSTRUCTIONS AND
FIBER CABLE STRIP BACK DRAWING FOR
PREPARATION AND TERMINATION.
SPECIAL INTERNAL BODY CAVITY AVAILABLE
UPON REQUEST, CONSULT FACTORY.

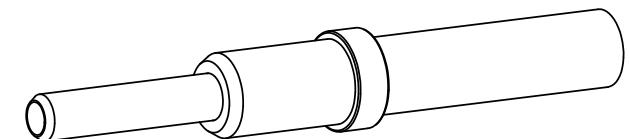

3D Model Image For Reference Only

NOTES UNLESS OTHERWISE SPECIFIED:

- 1) MATERIAL: CORROSION RESISTANT STEEL ALLOY
- 2) FINISH: PASSIVATED
- 3) FIBER TERMINATION PER XIOPTICS POF TERMINATION PROCESS FOR PLASTIC OPTICAL FIBER
- 4) DIMENSIONS ARE IN INCHES [MILLIMETERS]

UNLESS OTHERWISE SPECIFIED:		NAME	DATE
DIMENSIONS ARE IN INCHES AND [MM]			
TOLERANCES: ANGULAR: MACH ± 1 BEND ± 3 TWO PLACE DECIMAL $\pm .01$ THREE PLACE DECIMAL $\pm .005$ FOUR PLACE DECIMAL $\pm .0005$			
INTERPRET GEOMETRIC TOLERANCING PER: ANSI Y14.5M			
MATERIAL			
FINISH			
DO NOT SCALE DRAWING			
XiOptics, LLC			
TITLE: 29504 / 6 PLASTIC OPTICAL FIBER PIN			
SIZE	DWG. NO.	REV	
B	XOPOFP0002	CU1	
SCALE: CAD	WEIGHT:	SHEET 1 OF 1	

8 7 6 5 4 3 2 1