



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF WRAITHCON. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF XIOPTICS IS PROHIBITED.

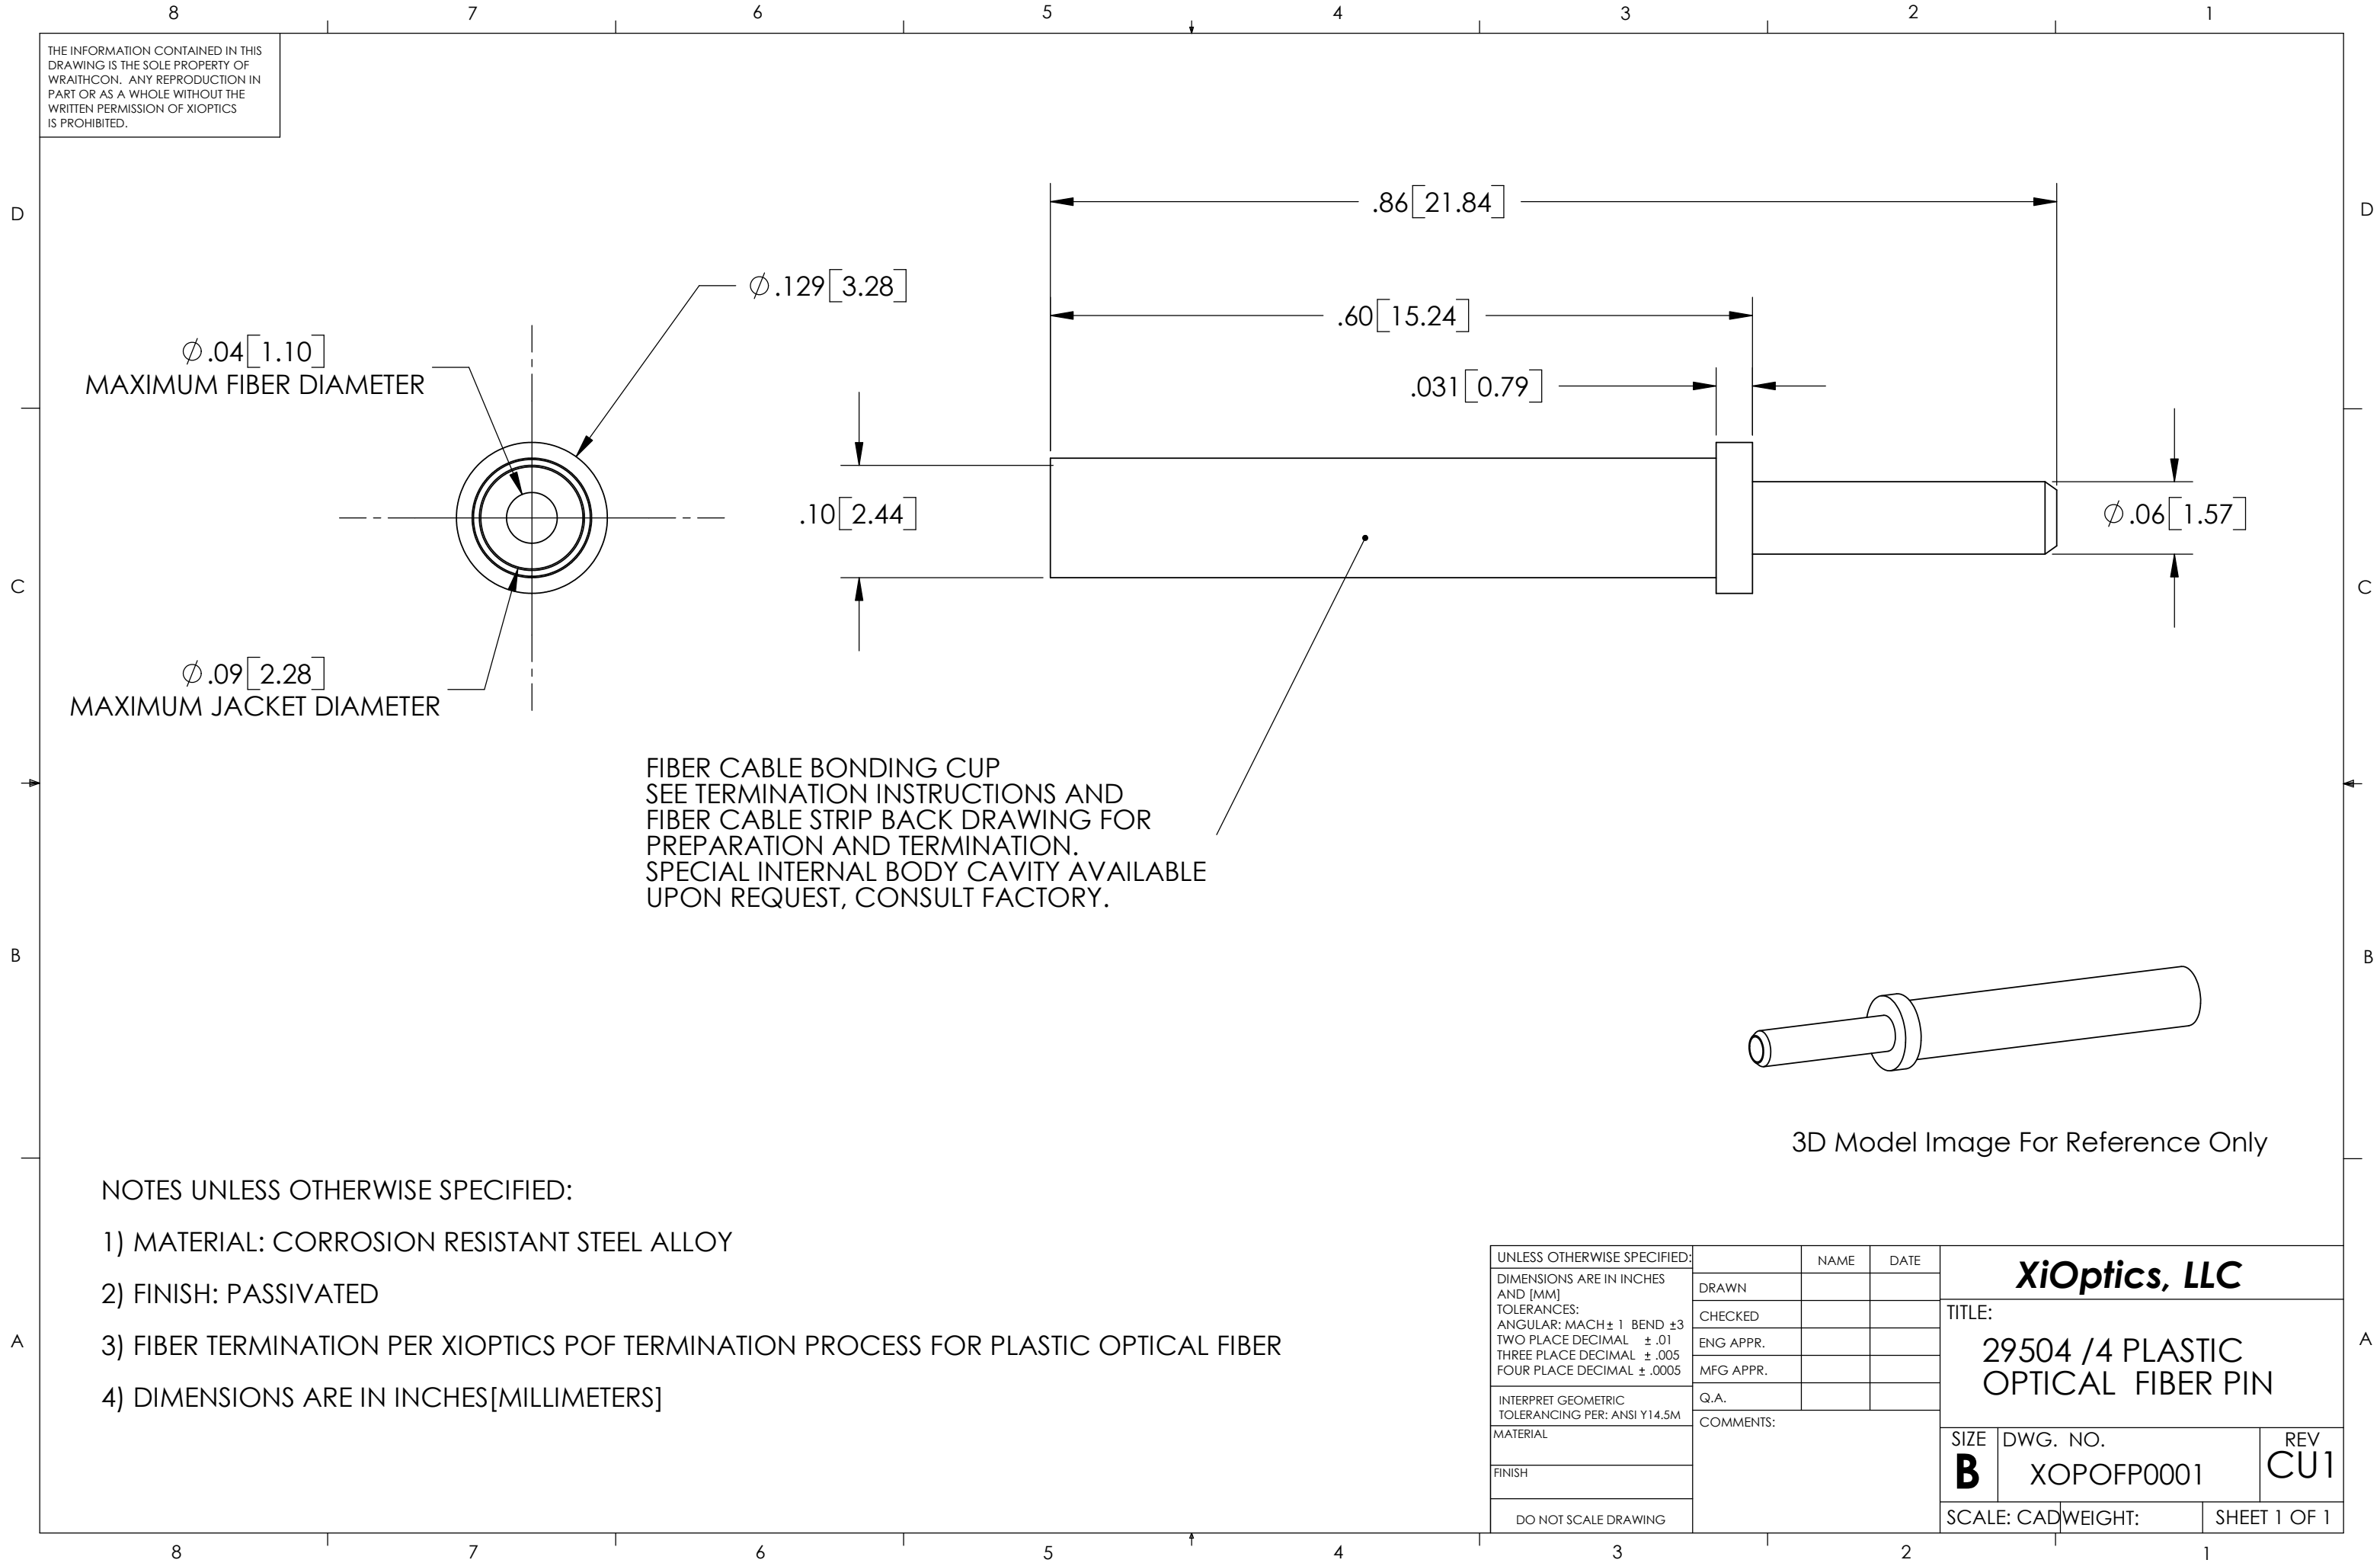

FIBER CABLE BONDING CUP
 SEE TERMINATION INSTRUCTIONS AND
 FIBER CABLE STRIP BACK DRAWING FOR
 PREPARATION AND TERMINATION.
 SPECIAL INTERNAL BODY CAVITY AVAILABLE
 UPON REQUEST, CONSULT FACTORY.

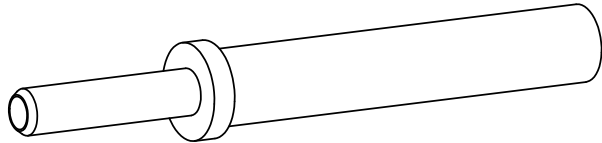

3D Model Image For Reference Only

NOTES UNLESS OTHERWISE SPECIFIED:

- 1) MATERIAL: CORROSION RESISTANT STEEL ALLOY
- 2) FINISH: PASSIVATED
- 3) FIBER TERMINATION PER XIOPTICS POF TERMINATION PROCESS FOR PLASTIC OPTICAL FIBER
- 4) DIMENSIONS ARE IN INCHES[MILLIMETERS]

UNLESS OTHERWISE SPECIFIED:		NAME	DATE	XiOptics, LLC	
DIMENSIONS ARE IN INCHES AND [MM]		DRAWN			
TOLERANCES:		CHECKED		TITLE:	
ANGULAR: MACH ± 1 BEND ± 3		ENG APPR.		29504 /4 PLASTIC OPTICAL FIBER PIN	
TWO PLACE DECIMAL ± .01		MFG APPR.			
THREE PLACE DECIMAL ± .005		Q.A.		SIZE	DWG. NO.
FOUR PLACE DECIMAL ± .0005		COMMENTS:		B	XOPOFP0001
INTERPRET GEOMETRIC TOLERANCING PER: ANSI Y14.5M				REV	CU1
MATERIAL				SCALE: CADWEIGHT: SHEET 1 OF 1	
FINISH					
DO NOT SCALE DRAWING					