

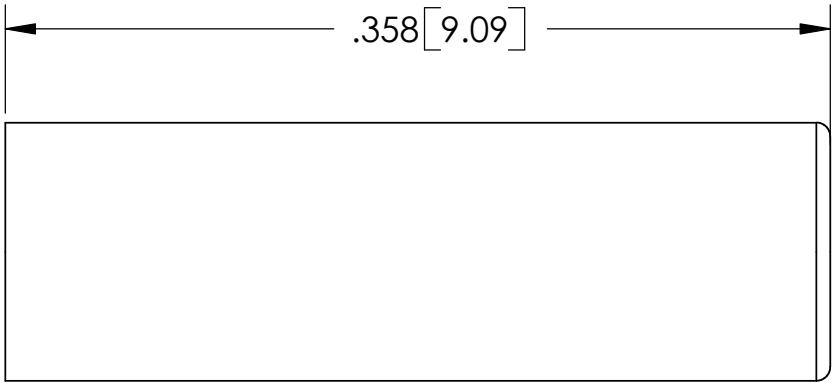


THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
WRAITHCON. ANY REPRODUCTION IN
PART OR AS A WHOLE WITHOUT THE
WRITTEN PERMISSION OF XIOPTICS
IS PROHIBITED.

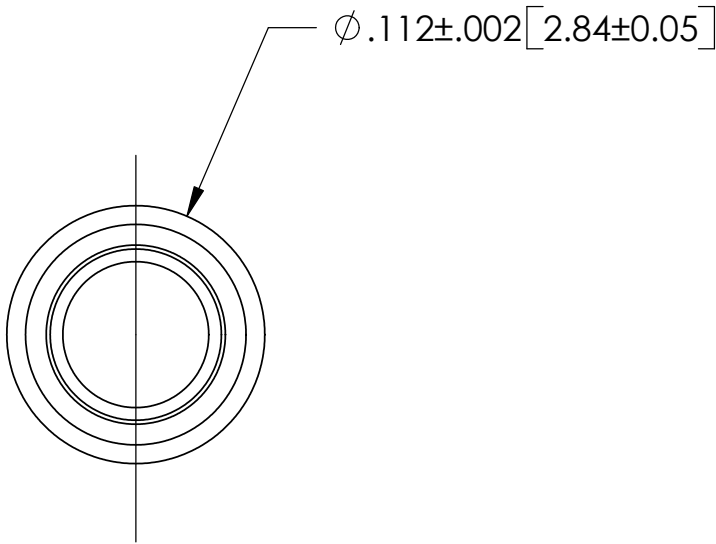

HOOD RETAINED WITH
THREADED INTERFACE TO SOCKET
BODY, THREAD LOCKING COMPOUND
OPTIONAL

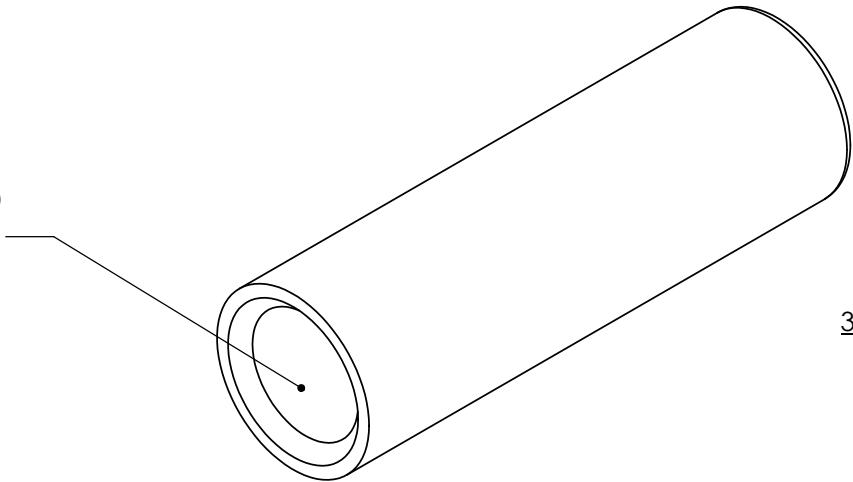

3D VIEW (REF. ONLY)

UNLESS OTHER SPECIFIED:

- 1) ALL HOOD METALLIC COMPONENTS ARE STAINLESS STEEL ALLOY, PASSIVATED FOR CORROSION RESISTANCE
- 2) FOR USE ONLY WITH XIOPTICS PLASTIC OPTICAL FIBER 29504 SOCKET TERMINUS ASSEMBLY
- 3) ALL DIMENSIONS ARE INCHES [MM]

UNLESS OTHERWISE SPECIFIED:			NAME	DATE	 — PRECISION OPTICAL COMPONENTS —			
DIMENSIONS ARE IN INCHES AND [MM] TOLERANCES: ANGULAR: MACH± 1 BEND ±3 TWO PLACE DECIMAL ± .01 THREE PLACE DECIMAL ± .005 FOUR PLACE DECIMAL ± .0005		DRAWN			TITLE: POF HOOD, SOCKET, CU			
		CHECKED						
		ENG APPR.						
		MFG APPR.						
		Q.A.						
INTERPRET GEOMETRIC TOLERANCING PER: ANSI Y14.5M	COMMENTS:				SIZE B DWG. NO. XOPOFH0001 REV CU1			
MATERIAL								
NOT APPLICABLE								
FINISH								
NOT APPLICABLE								
DO NOT SCALE DRAWING					SCALE: 12:1			
					WEIGHT:		SHEET 1 OF 1	