


XIOPTICS RESERVES THE RIGHT TO CHANGE THIS DOCUMENT WITHOUT NOTICE. THIS DOCUMENT IS INTENDED TO AID ONLY IN ORDERING XIOPTICS MATERIALS AND SHOULD BE CONSIDERED FOR REFERENCE ONLY.

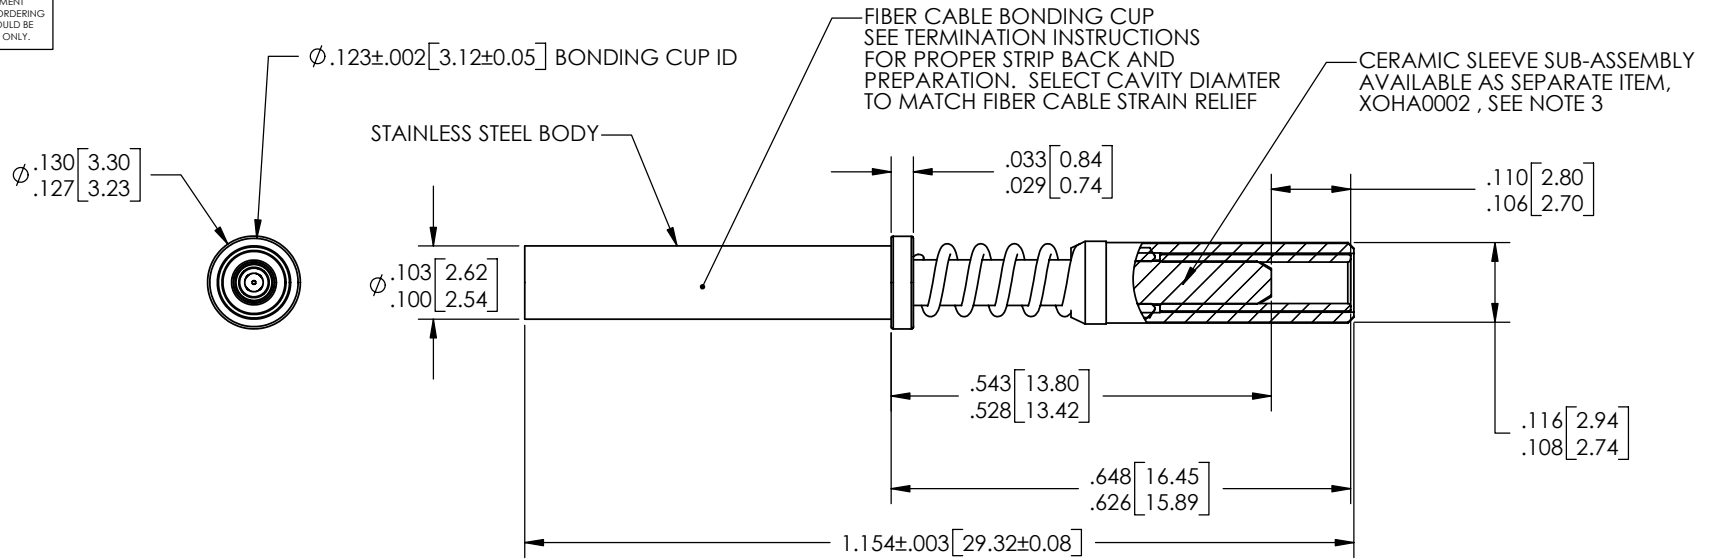


29504 SOCKET ORDERING INFORMATION:

XOS29504-5-SM-900-1255-Q2

Q2: QPL STYLE 2  
C2: COTS STYLE 2

P/N	DESCRIPTION
900	900 MICRON JACKET FIBER
2200	1.2MM JACKET FIBER
2200	1.8MM JACKET FIBER
2200	2.0MM JACKET FIBER

P/N	DESCRIPTION
1250	125.0 FERRULE
1255	125.5 FERRULE
1260	126.0 FERRULE
1270	127.0 FERRULE
1560	156.0 FERRULE
1420	142.0 FERRULE
1730	173.0 FERRULE
2360	236.0 FERRULE

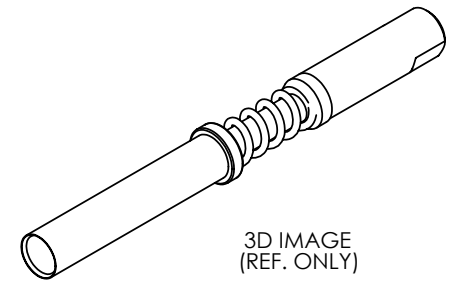

UNLESS OTHERWISE SPECIFIED:

- 1) ALL METALLIC COMPONENTS ARE CRS ALLOY, PASSIVATED
- 2) ALL CERAMIC COMPONENTS ARE ZIRCONIA
- 3) ALL DIAMETERS CONCENTRIC TO FERRULE DIAMETER WITHIN 0.003
- 4) SOCKET ASSEMBLY SHIPPED WITH REMOVAL BE HOOD ASSEMBLY INSTALLED, IF INDIVIDUAL HOOD ASSEMBLIES ARE REQUIRED ORDER P/N XOHA0002

UNLESS OTHERWISE SPECIFIED:		NAME	DATE	<b>XiOptics LLC</b>
DIMENSIONS ARE IN INCHES AND [MM]	DRAWN	J. B.	1/15/06	
TOLERANCES:	CHECKED			<b>XOS29504 ASSEMBLY CUSTOMER USE, SOCKET</b>
ANGULAR: MACH ± 1 BEND ± 3	ENG APPR.			
TWO PLACE DECIMAL ± .01	MFG APPR.			
THREE PLACE DECIMAL ± .005	Q.A.			SIZE
FOUR PLACE DECIMAL ± .0005	COMMENTS:			DWG. NO.
INTERPRET GEOMETRIC TOLERANCING PER: ANSI Y14.5M				XOSA0001CU
MATERIAL	SEE NOTES			REV
FINISH	SEE NOTES			CU3
DO NOT SCALE DRAWING				SCALE: 4:1
				WEIGHT:
				SHEET 1 OF 1